TECHNICAL DATA SHEET

PROPANE GAS FITTINGS

FORGED BRASS SAE 45° FLARE x P.O.L. (2005)

Applications:

LP-Gas, Natural Gas, Gasoline. Used with Copper, aluminum, and Welded Steel Hydraulic Tube that can be flared. Use long nut for vibration, forged for extreme cold.


Suitable for use with propane as vapour.

Working Pressure:

Dash Size	Tube O.D.	PSI	Copper Tube Wall
-6	3/8	1000	.032
-8	1/2	750	.032

Working Temperature:

-65°F (-54°C) to 250°F (120°C)

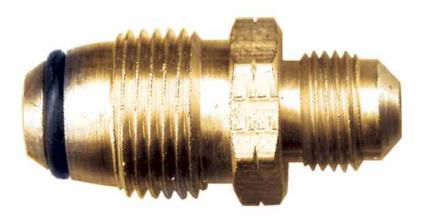

2005-6 AND -8

COPYRIGHT 2012, FAIRVIEW FITTINGS AND MANUFACTURING. ALL RIGHTS RESERVED