Low Pressure LP-Gas / Natural Gas Test Kit



Description & Features:

- Low pressure gauge built into protective case for ease in use and durability
- Sensitive diaphragm gauge
- Re-zero with external recalibration screw
- Easier to use than a manometer
- Plastic blow molded case for added durability
- Sleek design featuring secure latch
- Facilitates safe handling
- ASME B40.100 compliant
- CRN registered

Applications:


- Test kit for low pressure gas installations
- Suitable for non-clogging and non-corroding media

Gauge Speci ications

Dial	2.5" (63mm), white aluminum with red and black markings 0/35" water / 0/20 oz/in²
Case/Ring	Steel, painted black
Lens	Polycarbonate
Connection	Brass hose barb (1/4") (gear clamp included)
Diaphragm Element	Phosphor bronze
Movement	Engineered plastic upper and lower plate with brass pinion and sector, zero adjustment*
Ambient Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	±3-2-3% ANSI/ASME Grade B
Enclosure Rating	IP52

Case and Accessory Specifications

Hose / Barb	Rubber: 0.256" (6.5mm) ID x 0.472" (12mm) OD x 1.339" (34mm) 1/8" NPTM x 1/4" hose barb
Case Material	Plastic blow molded: 5.75" x 8.25" (146mm x 210mm)
Hose Tube	Rubber: 3' (91cm) in length; 0.197" (5mm) ID x 0.315" (8mm) OD
Clamp	304 SS 6-8mm gear clamp

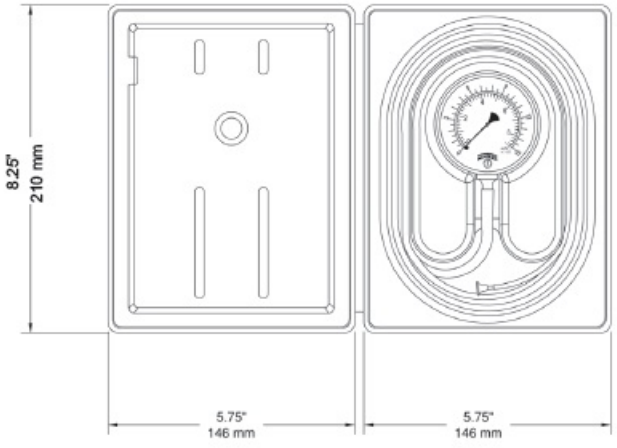

Copyright Fairview Ltd 2021